

Model Number: LED-180



Product Description:

The unique linear Lumen 180™ may be applied in a range of lighting applications appropriate to its shape and is particularly effective in lighting sheet flow water effects and for perimeter lighting.



Detail:

Color	Lux ¹ at Distance from Source				
	1m	2m	3m	4m	5m
All	1000	290	140	76	52
Red	480	140	64	36	24
Green	450	130	60	34	24
Blue	88	28	12	7	4.8

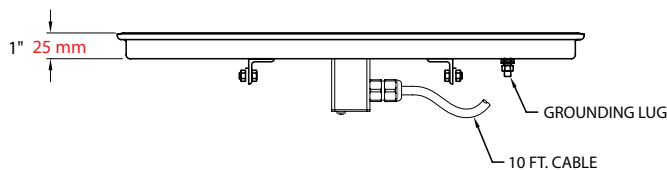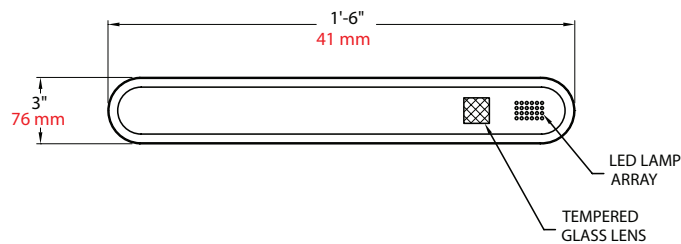

Specification:

Housing:	20 gauge deep drawn stainless steel, gas filled and permanently sealed. Circuit board and lamp bases are totally encapsulated in a heat-dissipating epoxy compound to prevent moisture intrusion.
Mounting:	Available with yoke and base mounting (YK), riser mounting (R), or bracket mounting (BR).
Lens:	3/16" thick tempered glass.
Lamps:	(260) LED with 15° beam angle.
Lamp Colors:	The lamp mix and distribution of red, green, and blue diodes is designed to maximize lumen output through over 16 million color variations.
Color Capabilities:	Fades and multi-color strobe using CLED Series Controllers
Power Connection:	Furnished with thirty feet of Type STOW submersible non-wicking cable with IP68 waterproof connector.
Power:	14 VDC.



fountain people

Story | Water | Light | Motion

Fountain People, Inc.
 P.O. Box 807
 San Marcos, TX 78666
 T: 512.392.1155
 F: 512.392.1154
 www.fountainpeople.com

Catalog #	
Details	
Project	
Prepared by	
Date	